

UV Radiometer 2.0

GUVC-T11GS2-I7LW11



Description

Check the absolute power and relative power (change the setting) with UVA/B/C Sensor Probe
There are two relay (Normal & alarm). And you can set the alarm value.

Constitution

Display, Sensor Probe, Connection Cable

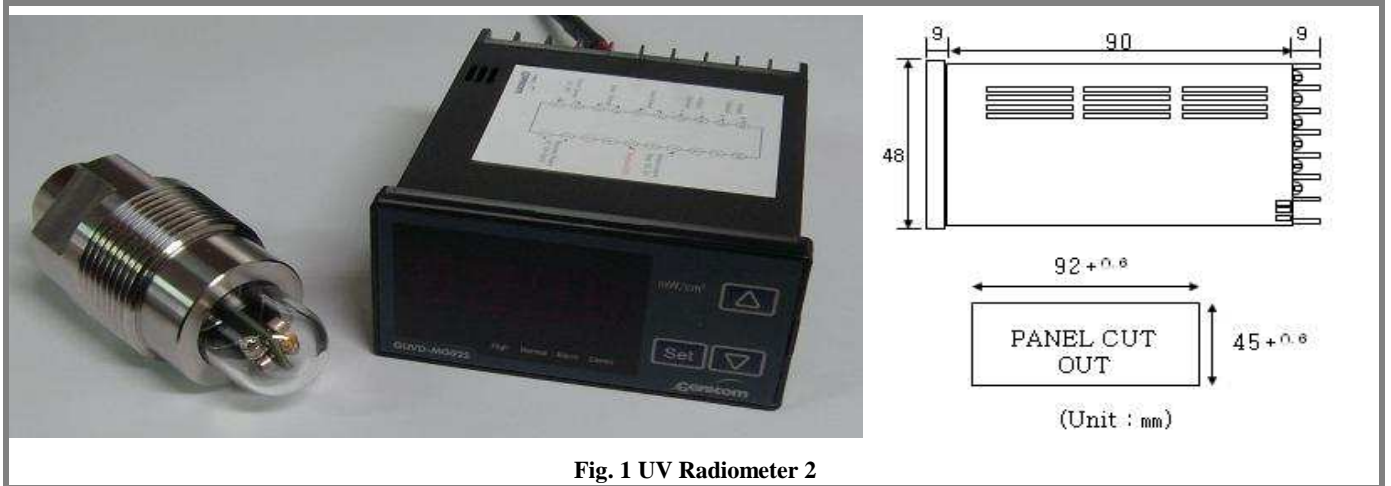


Fig. 1 UV Radiometer 2

Case dimensions

Thread/Length for Mounting	Body (mm)	Window (mm)	Head (mm)	Wrench Size (mm)	Length (mm)	Weight (kg)	Body (stainless steel)
PT 1 1/4 "/21 mm	Φ42	Φ24×24	Φ36×15	36	81	0.44	316-L (1.4404)

* Panel Cutting Size : 92 × 45 mm² (Tolerance : -0, +0.5 mm)

Absolute Maximum Ratings

Parameter	Value			Unit	Remark
	Min.	Typ.	Max.		
Operating Temperature	-30		85	℃	Sensor Probe
	0		50	℃	Display
Power Consumption			5	VA	

Electro-Optical Characteristics (at 25 ℃)

Parameter	Value			Unit	Remark
	Min.	Typ.	Max.		
Detection Wavelength Range	220		280	nm	
Detection Power Range	0		100	mW/cm ²	

Connection (Backside of Display)

1. Main Power : 1 & 2, AC 100 ~ 240 V 50/60 Hz, 5 AC Ground
2. Sensor Probe : 11(Vcc), 12(GND), 6(Sensor output), 5(GND)
3. Relay : 13 & 14 (Normal), 15 & 16 (Alarm)
4. 4-20 mA Current Output : 17(+), 18(-)

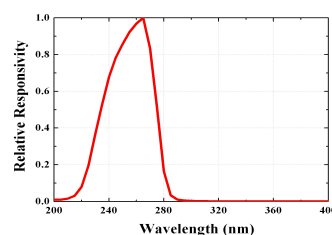


Fig. 2 Responsivity Curve