

# UV Radiometer 2.0

## GUVx-T1xGS2-2LA2



### Description

Air Enviroments, Display : Absolute Power, Output of Display : Relay, 4-20mA (Option), RS485 (Option)

**Constitution** Display, Sensor Probe

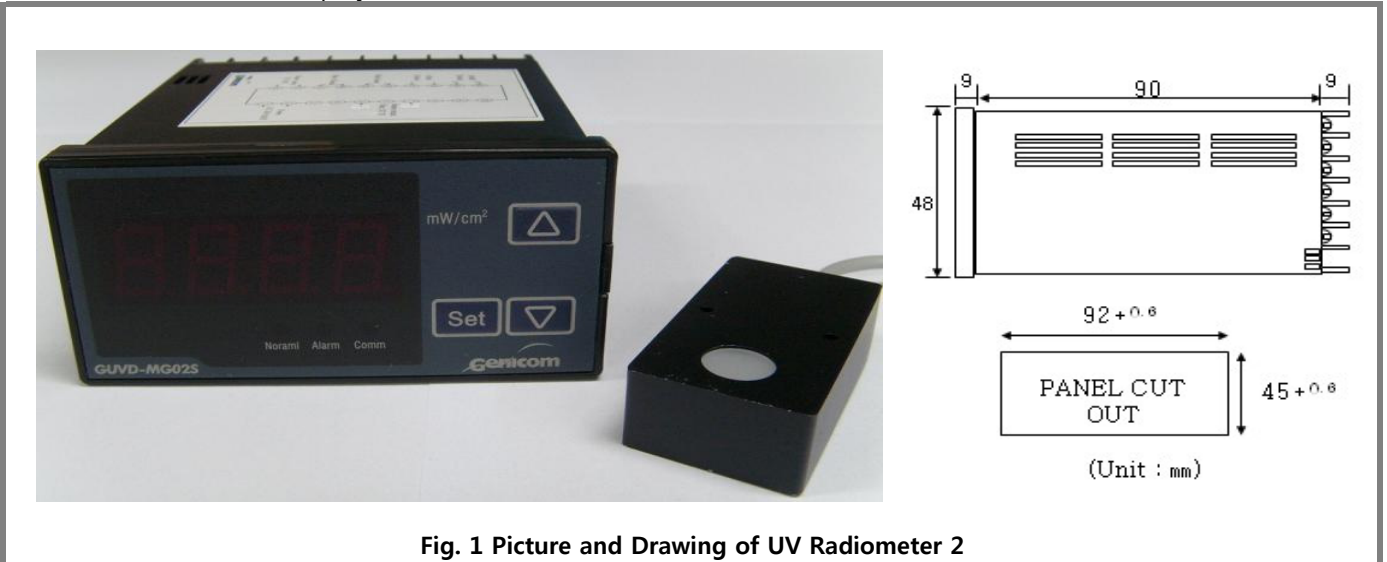


Fig. 1 Picture and Drawing of UV Radiometer 2

### Case Dimensions

Size (W×L×H, mm <sup>3</sup> )	Window (mm)	Weight (g)	Case Material	Cable Length (m)
55 × 30 × 16	12	57	AL-60	5

### Absolute Maximum Ratings

Parameter	Value			Unit	Remark
	Min.	Typ.	Max.		
Operating Temperature	-30		85	°C	Sensor Probe
	0		50	°C	Display
Power Consumption			5	VA	

### Electro-Optical Characteristics (at 25 °C)

Model No.	Parameter	Value			Unit	Remark
		Min.	Typ.	Max.		
Detection Range	GUVA-T11GS2-2LA2	230		395	nm	
	GUVB-T11GS2-2LA2	220		320	nm	
	GUVC-T10GS2-2LA2	220		280	nm	
Detection Power Range		0		100	mW/cm <sup>2</sup>	

### Connection (Backside of Display)

- |  |                                    |
|--|------------------------------------|
| 1. Main Power : 1 & 2, AC 100 ~ 240 V 50/60 Hz               | 4. 4-20 mA (Option) : 17(+), 18(-) |
| 2. Sensor Probe : 11(Vcc), 12(GND), 6(Sensor output), 5(GND) | 5. RS485 (Option) : 19(A), 20(B)   |
| 3. Relay : 13 & 14 (Normal), 15 & 16 (Alarm)                 |                                    |