


DESCRIPTION

This is a high radiance InGaAs IR LED optimized for fiber optic applications requiring high power and a fast response time.

FEATURES

- High Coupled Power
- High Electrical Bandwidth/Fast response time
- High Reliability/Hermetic Package
- Similar to AMP 259012-2

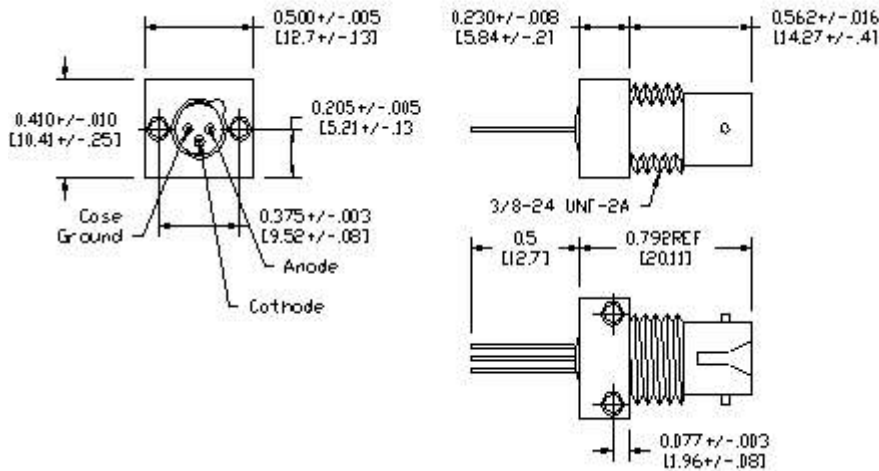

ABSOLUTE MAXIMUM RATINGS

- Storage temperature..... -55°C to +125°C
- Case operating temperature..... -40°C to +85°C
- Lead solder temperature..... 260°C, 10 seconds
- Continuous forward current..... 100 mA
- Reverse Voltage..... 3 Volts

OUTLINE DIMENSIONS

Tolerances are +/-0.005 inches, except as noted
The case is electrically isolated from the pins.

PARAMETER	TEST CONDITION	SYMBOL	MIN	TYP	MAX	UNIT
Forward Voltage	I _f = 100 mA	V _f		0.8	2.0	Volts
Reverse Voltage	I _r = 10 μA	BVR	3.0			Volts
Capacitance	V _r = 0 V, f = 1 MHz	C		70		pF
Fiber Coupled Power	I _f = 100 mA, 50 μm Core dia, .21 NA	P _{oc}	20 -17	30 -15		μW dBm
Fiber Coupled Power	I _f = 100 mA, 62.5 μm Core dia, .28 NA	P _{oc}	50 -13	75 -11		μW dBm
Total Optical Power	I _f = 100 mA	P _{out}	0.3	0.8		mW
Response Time	10%-90%, 1V Prebias I _f = 100 mA	t _r t _f		4 4	6 6	nsec nsec
Peak Wavelength	I _f = 100 mA	λ _p	1280	1310	1350	nm
Spectral Bandwidth	I _f = 100 mA	Δλ		145		nm
Electrical Bandwidth	I _f = 100 mA	BWE		85		MHz

ELECTRO-OPTICAL CHARACTERISTICS (Case T = 25°C)

distributed by



Ohmstrasse 4
85716 Unterschleissheim
www.imm-photonics.de

Tel.: +49 89 3214120
Fax.: +49 89 32141211
sales@imm-photonics.de