

UV Radiometer 5.0

GUVx-T1xGS5-5LW9



Description

Display : Absolute Power (AP), Relative Power (RP), and Accumulative Time (AT)

Output : DC Voltage, Current, and Relay

Constitution

Display, Sensor Probe, Cable



Fig. 1 UV Radiometer 5.0 (Size of Display : 97 × 50 × 112mm³)

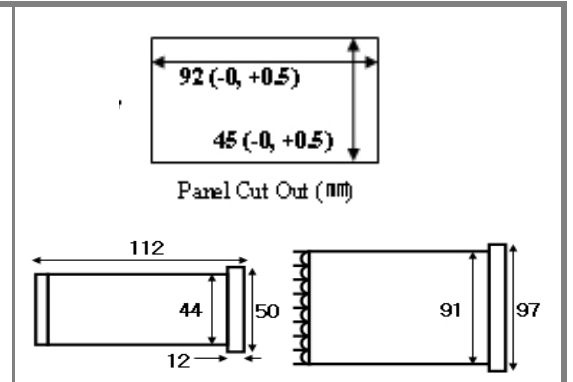


Fig. 2 Size of UV Radiometer 5.0

Sensor Probe Dimensions

Thread/Length for Mounting	Diameter (mm)	Window (mm)	Wrench Size (mm)	Depth (mm)	Length (mm)	Case Material
PT3/4" / 11 mm	23	12	30	11.5	41.5	STS 316-L

Absolute Maximum Ratings

Parameter	Value	Unit	Remark
Operating Temperature	-30 ~ 85	°C	Sensor Probe
	0 ~ 50	°C	Display
Working humidity	35 ~ 85	%RH	Display
Power Supply	85 ~ 265	VAC	50/60 Hz

Parameter	Min.	Peak	Max.	Unit	Remark	
Detection Power Range	0		19,999	$\mu\text{W}/\text{cm}^2$		
Detection Range	GUVV-T10GS5-5LW9	230	350	395	nm	10% of Max
	GUVB-T11GS5-5LW9	220	300	320	nm	
	GUVV-T10GS5-5LW9	220	254	280	nm	

Function

1. Display : Absolute Power ($\mu\text{W}/\text{cm}^2$) , Relative Power (%), and Accumulative Time (Hours).
2. Output : DC Voltage (1~5V DC), DC Current (4-20 mA, 300 Ω max load), Relay (NC/NO, 250VAC 3A/30VDC 3A)