

760nm VCSEL LASER

EP760-VC-TP46- Preliminary




eblanaphotonics




ADVANCED O₂ DETECTION

Eblana Photonics EP760-VC laser diode, is the perfect tool for TDLAS-based O₂ sensing. Eblana's advanced VCSEL platform is used to design a cost effective, highly coherent and stable single mode laser.

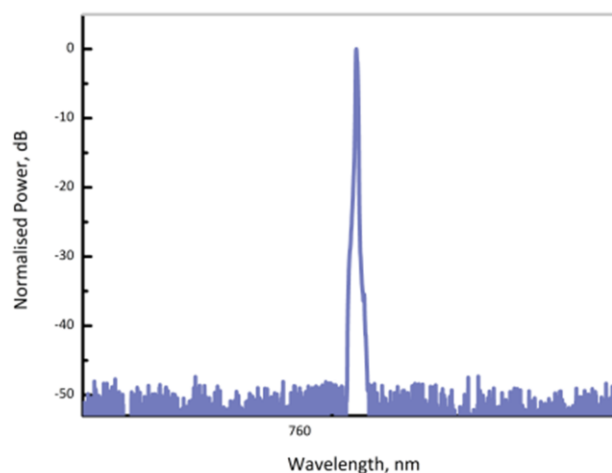

Representative optical spectrum at 25 °C

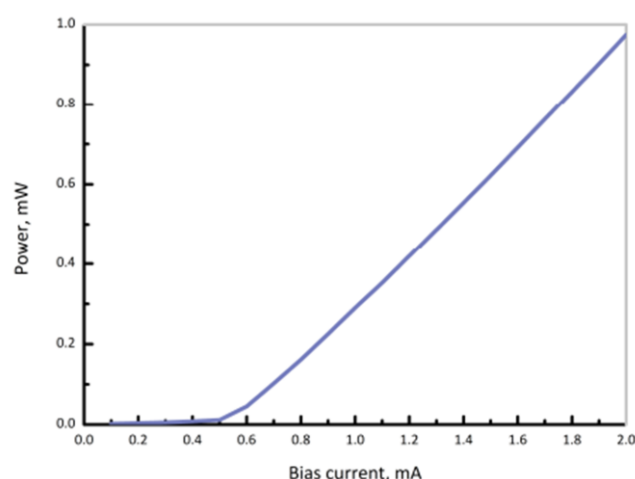

Representative LI curve (ex-fiber - estimated)

ELECTRO-OPTICAL CHARACTERISTICS* (T_{SUB} = 25 °C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Centre Wavelength (25°C, 1.5mA)	λ	-	760	-	nm
Side Mode Suppression Ratio	SMSR	25	30	-	dB
Threshold Current	I_{th}	-	0.5	-	mA
Output Power (at I_{op})	P_f	-	0.5	-	mW
Optical linewidth	Δf	-	100	-	MHz
Temperature Tuning Coefficient	T_λ	-	0.05	-	nm/°C
Current Tuning Coefficient	I_λ	-	0.38	-	nm/mA
Slope Efficiency	SE	-	0.55	-	mW/mA
Thermistor Resistance	R_T	9.7	10	10.3	k Ω
Beta Coefficient (25°C /85°C)	Beta	-	3930	-	K
Beam divergence – perpendicular	$\theta_\perp$	-	11	-	degrees
Beam divergence – parallel	$\theta_\parallel$	-	11	-	degrees

*CW bias unless otherwise stated

©Eblana Photonics Series 760-VC Rev 0.2



eblanaphotonics

distributed by



IMM photonics

Ohmstrasse 4
85716 Unterschleißheim
www.imm-photonics.de

Tel.: +49 89 3214120
Fax.: +49 89 32141211
sales@imm-photonics.de


ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
Forward Current	I_f	-	2	mA
Forward Voltage	V_f	-	2	V
Case Temperature*	T_{Case}	-20	65	°C
Chip Submount Temperature	T_{Sub}	0	50	°C
Storage Temperature	$T_{storage}$	-40	85	°C

*For $T_{sub} < 25^{\circ}C$, Max Case Temperature should be derated to $T_{Case,Max} = T_{sub} + 40^{\circ}C$

PACKAGING

The EP760-VC-T46 product series is offered in a TO46 can package - Please inquire for other packaging options. Standard package pinout is shown below, variations may be requested.

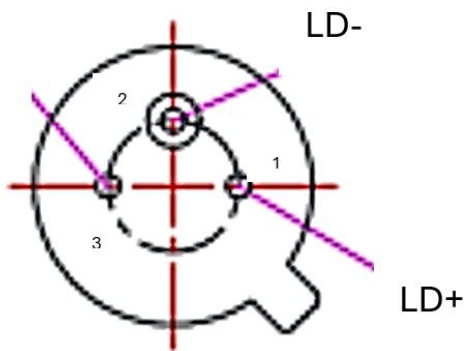


TO46 schematic - header top view

PIN NO	DESCRIPTION
1	LD +
2	LD - /Case Ground
3	NC

TO46 pinout

HOW TO ORDER

Construct your part number using the following example and email your order to sales@eblanaphotonics.com, or call +353 1 675 3228.

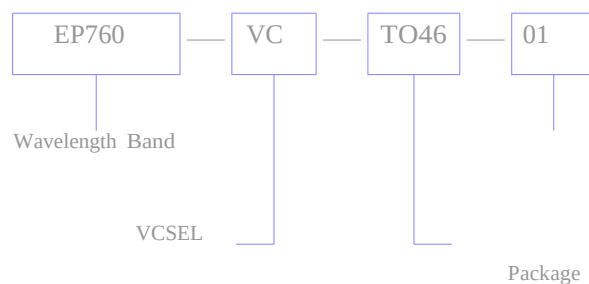

Laser Safety

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1, Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton.

©Eblana Photonics 2014. Eblana Photonics Reserves the right to amend this document at any time, without prior warning. ©Eblana Photonics Series 760-DM-B Rev 0.2



eblanaphotonics

distributed by



Ohmstrasse 4
85716 Unterschleissheim
www.imm-photonics.de

Tel.: +49 89 3214120
Fax.: +49 89 32141211
sales@imm-photonics.de