


High Power Laser Diode 2CM Fiber Module



Part Number: 2CM-004

High Power 2CM Fiber Coupled Module
Multi-Mode Fabry-Perot
CW Wavelength at 1550nm

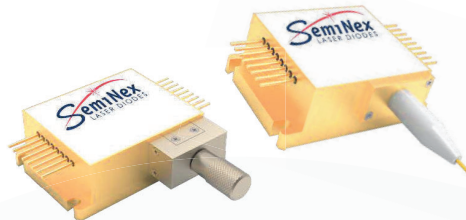

Features

- Two Laser Chip Package
- Cost Effective Fiber Coupled Design
- High Output Power
- High Dynamic Range
- High Efficiency
- High Heat Load Package
- Red Aiming Beam Included

Application

- Medical
- DPSS Pump Source
- Defense / Aerospace



SemiNex delivers the highest available power at infrared wavelengths between 12xx and 19xx nm. When necessary, we will further optimize the design of our InP & GaSb laser chips to meet our customers' specific optical and electrical performance needs. Diodes, bars and packages are tested to meet customer and market performance demands. Typical results and packaging options are shown. Contact SemiNex for additional details or to discuss your specific requirements.

SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

1 | Page

Individual. Innovative. Exceptional.

Distributed by IMM Photonics GmbH | imm-photonics.de | phone +49 89 321412-57 | sales@imm-photonics.de

High Power Laser Diode 2CM Fiber Module



Specification

2CM-004



Optical	Symbol	Typ.	Units
Center Wavelength	λ_c	1550	nm (± 20)
Output Power (CW)*	P_{out}	5.0	Watts ($\pm 10\%$)
Spectral Width FWHM	$\Delta\lambda$	10	nm
Slope Efficiency	η	0.52	W/A
Optical Fiber Core Dia.		105	μm
Optical Fiber NA		0.22	
Electrical	Symbol		Units
Power Conversion Eff.	η	16	%
Operating Current	I_{op}	10.5	A
Threshold Current	I_{TH}	0.5	A
Operating Voltage	V_{op}	3.2	V
Aiming Beam	Symbol		Units
Output Power	P_a	10	mW
Wavelength	λ_a	635	nm
Operating Current	I_{op}	65	mA
Voltage Limit	V_{max}	2.3	V
Mechanical			Units
Connector Type		SMA905	
Fiber Length		1	meters
Thermistor Constant		3477	β
Thermistor Resistance		10	K ohm
		Range	
Operating Temp.**		-40 to 60	$^{\circ}C$
Storage Temp.		-40 to 80	$^{\circ}C$

*Specified values are rated at a constant heat sink temperature of 20°C.

**High temperature operation will reduce performance and MTTF.
Unless otherwise indicated all values are nominal.

Suffix	Description
-189	10mW Red Aiming Beam Option


SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

High Power Laser Diode 2CM Fiber Module




SemiNex Laser Diodes 2CM-004


Graphs & Data

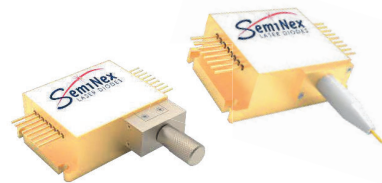

Typical 2CM L-I-V Characteristics

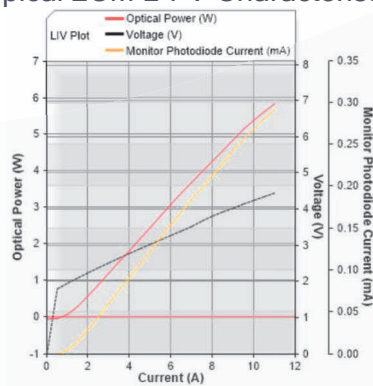

Typical 2CM Output Spectrum


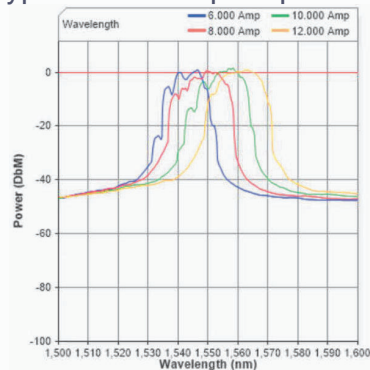


SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

High Power Laser Diode 2CM Fiber Module




2CMDF Mechanical Drawing Detachable Fiber

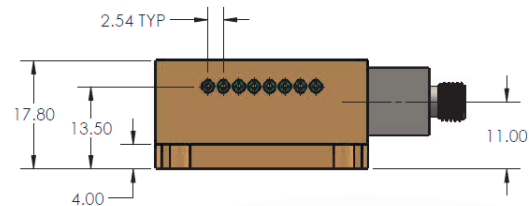

PIN OUT:

A. SMA-905 INPUT

1. N/C
2. PD (+)
3. PD (-)
4. AIMING BEAM (+)
5. AIMING BEAM (-)
6. N/C
7. THERMISTOR
8. THERMISTOR
9. LD ANODE (+)
10. LD CATHODE (-)
11. N/C
12. N/C
13. N/C
14. N/C
15. N/C
16. N/C
17. N/C

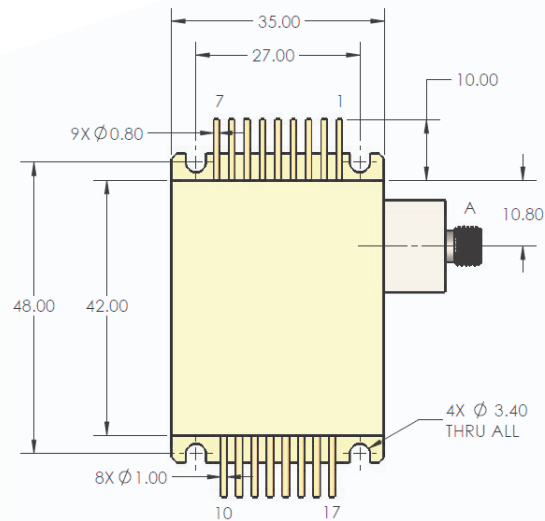

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 2024 SemiNex Corporation



SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com



High Power Laser Diode 2CM Fiber Module




2CM Mechanical Drawing With Fiber

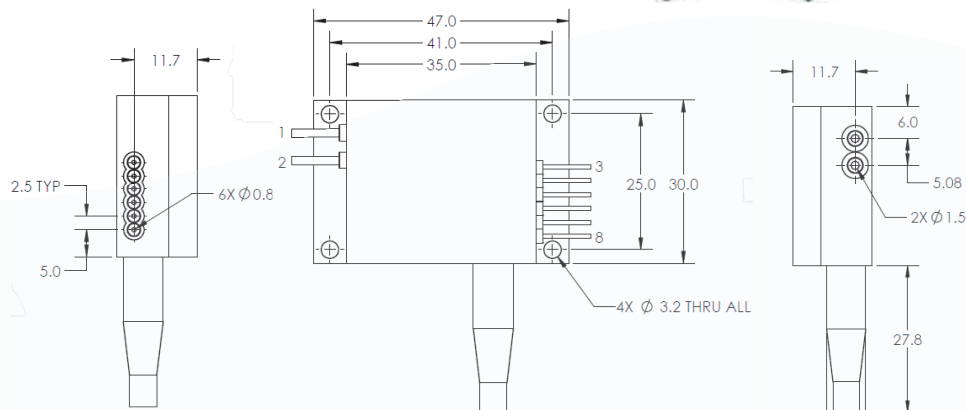

PIN CALLOUT:
(FOR REFERENCE ONLY. REFER TO
DOCUMENTATION SUBMITTED WITH
PRODUCT FOR ACTUAL PIN CALLOUT)

1. LD CATHODE (-)
2. LD ANODE (+)
3. AIMING BEAM (-)
4. AIMING BEAM (+)
5. THERMISTOR
6. THERMISTOR
7. PD (-)
8. PD (+)

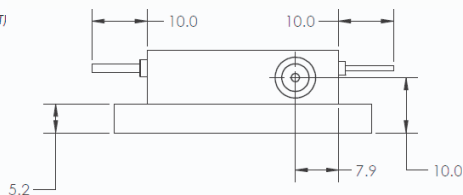

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 2024 SemiNex Corporation



SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com