


High Power Laser Diode Laser Engine-Q Package



Part Number: LEQ-122

High Power Laser Engine-Q Package
Multi-Mode Fabry-Perot Laser Diode
Wavelength at 1450nm



Features

- High Output Power
- High Dynamic Range
- High Efficiency
- Laser Engine-Q Package
- Cost Effective

Application

- Home Medical



SemiNex delivers the highest available power at infrared wavelengths between 12xx and 19xx nm. When necessary, we will further optimize the design of our InP & GaSb laser chips to meet our customers' specific optical and electrical performance needs. Diodes, bars and packages are tested to meet customer and market performance demands. Typical results and packaging options are shown. Contact SemiNex for additional details or to discuss your specific requirements.

SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

1 | Page

Individual. Innovative. Exceptional.

Distributed by IMM Photonics GmbH | imm-photonics.de | phone +49 89 321412-57 | sales@imm-photonics.de

High Power Laser Diode Laser Engine-Q Package



Specification

LEQ-122



Optical	Symbol	Typ.	Units
Center Wavelength	λ_c	1450	nm (± 20)
Output Power (CW)*	P_{out}	2	watts ($\pm 10\%$)
Spectral Width	$\delta\lambda$	10	nm 3dB
X-Axis Divergence* with matched lens	Θ_x	28	deg FMHW
Y -Axis Divergence* with matched lens	Θ_y	28	deg FWHM
X-Axis Divergence* with FAC lens	Θ_x	10	deg FMHW
Y -Axis Divergence* with FAC lens	Θ_y	2	deg FWHM
Electrical	Symbol		Units
Power Conversion Eff.	η	16	%
Operating Current	I_{op}	8	A
Threshold Current	I_{th}	0.5	A
Operating Voltage	V_{op}	1.7	V
Fan	Symbol		Units
Voltage (DC)	VDC	5	V
Power	watts	0.4	W
Air Flow	CFM	3	cubic feet/minute
		Range	
Operating Temp.**		-40 to 85	$^{\circ}\text{C}$
Storage Temp.		-40 to 85	$^{\circ}\text{C}$

*Refer to Mechanical drawing.

****Laser engine includes a Lens and a Cooling Fan**

*Specified values are rated at a constant heat sink temperature of 20 $^{\circ}\text{C}$.

**High temperature operation will reduce performance and MTTF.
Unless otherwise indicated all values are nominal.

*Available Lenses & Caps

Part Number	Description
LEQ-122-178	LEQ lens SA Matched , f=1.36mm, with fan
LEQ-122-172	LEQ Lens Collimated FAC, f=7.7mm, with fan

SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

2 | Page

Individual. Innovative. Exceptional.

Distributed by IMM Photonics GmbH | imm-photonics.de | phone +49 89 321412-57 | sales@imm-photonics.de


High Power Laser Diode Laser Engine-Q Package




SemiNex Laser Diodes LEQ-122

Graphs & Data

Typical LEQ L-I-V Characteristics

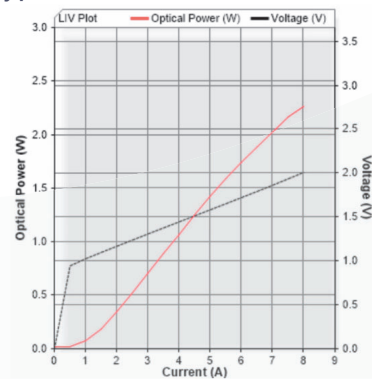

Typical LEQ Output Spectrum

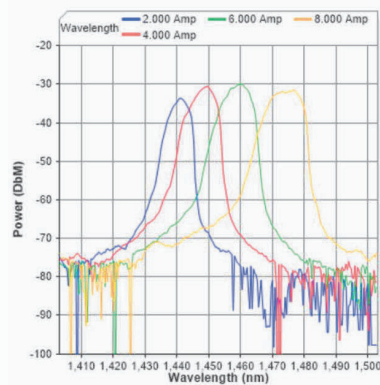



Site 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

High Power Laser Diode Laser Engine-Q Package



Mechanical Drawing Part Number: LEQ-122-178

PIN OUT:	
1.	LD Anode (+), #20 AWG
2.	LD Cathode (-), #20 AWG
3.	FAN (+5V), #28 AWG
4.	FAN (-), #28 AWG

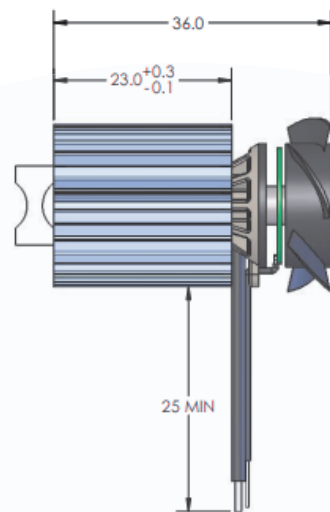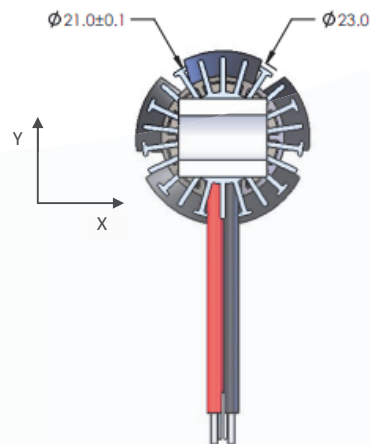

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 2024 SemiNex Corporation

SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com





High Power Laser Diode Laser Engine-Q Package



Mechanical Drawing Part Number: LEQ-122-172

PIN OUT:	
1.	LD Anode (+), #20 AWG
2.	LD Cathode (-), #20 AWG
3.	FAN (+5V), #28 AWG
4.	FAN (-), #28 AWG

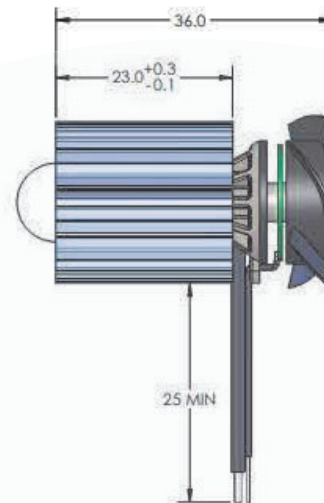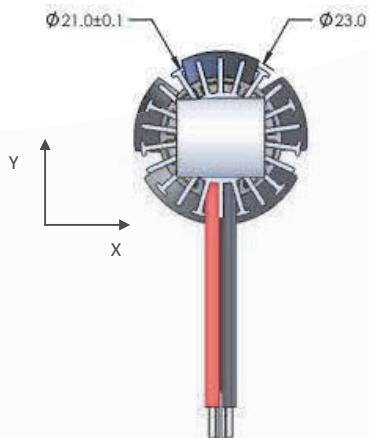

All statements, technical information and recommendations related to the product herein are based upon information believed to be reliable or accurate. The accuracy or completeness herein is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. SemiNex Corporation reserves the right to change at any time without notice the design, specification, deduction, fit or form of its described herein, including withdrawal at any time of a product offered for sale herein. Users are encouraged to visit www.seminex.com for the latest data. SemiNex Corporation makes no representations that the products herein are free from any intellectual property claims of others. Please contact SemiNex for more information. 2024 SemiNex Corporation

SemiNex Corporation • 153 Andover Street, Suite 201, Danvers, MA 01923 • 978-326-7700 • sales@seminex.com

