

QD LASER

QLD1x6P-xxC0 series

1 μ m 300mW DFB Laser BFY Module under 1-10 ns Pulsed Operation

C00233-02 March 2024



1. DESCRIPTION

The QLD1x6P-xxC0 is a high power 1 μ m-wavelength range distributed feedback (DFB) laser under 1-10 ns pulsed operation for use in seeder for fiber lasers and sensing applications. The laser is assembled into a 14-pin butterfly package with an optical isolator, a monitor PD and a thermo-electric cooler.

2. FEATURES

- Single longitudinal mode operation
- High peak output power of 300mW under pulsed operation
- 1-10 ns pulse width available
- Fiber-pigtailed 14-pin butterfly package with a TEC
- Optical isolator integration
- Polarization maintaining fiber integration

3. APPLICATIONS

- Seeder for fiber lasers
- Sensing

4. ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNIT
Optical Output power (CW)	P_f	50	mW
LD Forward Current (CW)	I_f	250	mA
Peak Output power (Pulse 10 ns/1MHz)	P_{f_pulse}	450	mW
LD Peak Current (Pulse 10 ns/1MHz)	I_{f_pulse}	2	A
LD Reverse Voltage	V_{RLD}	2	V
TEC Drive Current	I_{TEC}	2	A
TEC Drive Voltage	V_{TEC}	4.3	V
Operation Temperature	T_c	0 to 60	$^{\circ}$ C
Storage Temperature	T_{stg}	-40 to 85	$^{\circ}$ C
Lead Soldering Temperature (10 s)	T_{sld}	260	$^{\circ}$ C



QLD1x6P-xxC0

C00233-02

5. OPTICAL AND ELECTRICAL CHARACTERISTICS

(T_{LD} = 25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Peak Wavelength	λ_p	CW, P _f =30 mW	λ_p-5 (*2)	λ_p (*1)	λ_p+5 (*2)	nm
Temperature Coefficient of λ_p	d λ_p /dT	CW / Pulsed	-	0.08	-	nm/K
Threshold Current	I _{th}	CW / Pulsed	-	15	30	mA
CW Fiber Output Power	P _f	CW	30	-	-	mW
CW Operation Voltage	V _{op}	CW, P _f =30 mW	-	1.8	-	V
Pulsed Peak Output Power	P _{f_peak}	Pulsed, I _{f_peak} =1.5 A	300	340	-	mW
Pulsed Averaged Output Power	P _{f_ave}	Pulsed 1 ns/100kHz/1.5A	30	34	-	μW
		Pulsed 10 ns/100kHz/1.5A	300	340	-	μW
Pulse Width	t _{pw}	Pulsed	1	-	10	ns
Duty Cycle	D.C.	Pulsed	-	-	1(*3)	%
Sidemode Suppression Ratio	SMSR	CW, P _f =30 mW	30	40	-	dB
		Pulsed 1ns/100kHz	25	30	-	dB
Spectral line width	$\Delta\lambda$	Pulsed 1ns/100kHz, @-3dB from peak		0.04		nm
Polarization Extinction Ratio	PER	CW	15	20	-	dB
Monitor PD Current	I _m	CW, P _f =30 mW	-	300	-	μA
Thermistor Resistance	R _{th}	T _{LD} = 25°C, B=3900K	9.5	10	10.5	kΩ

(*1) Available peak wavelength is from 1018 to 1122 nm and 1140 to 1188nm.

(*2) Tighter wavelength tolerance is available as an option.

(*3) Higher duty cycle is available with proper adjustment of a peak current. Please ask QDL for more detail.

6. PRODUCT PART NUMBER

Part Number	Fiber Type	Fiber Diameter	Connector
QLD1x6P-xxC0	Polarization maintaining fiber	900um	FC/APC
QLD1x6P-xxC0-11		250um	Ferrule

Examples of product name


Peak Wavelength (nm)	Part Number
1030	QLD106P-30C0
1053	QLD106P-53C0
1064	QLD106P-64C0
1083	QLD106P-83C0
1120	QLD116P-20C0
1180	QLD116P-80C0

QD LASER


QLD1x6P-xxC0

C00233-02

7. OUTLINE DRAWING

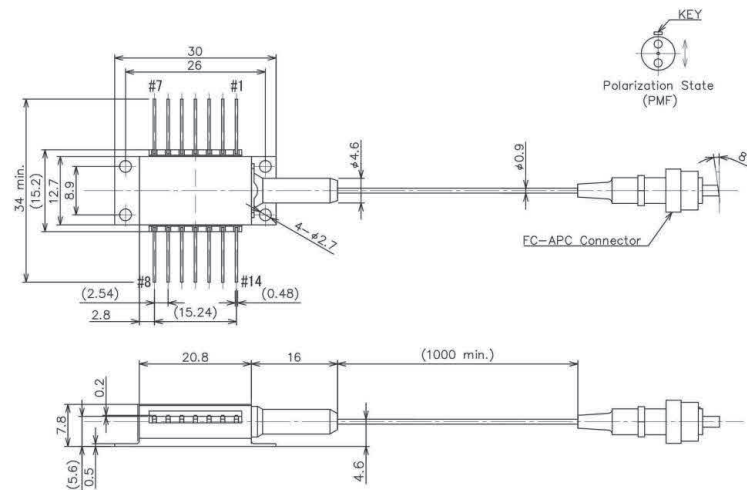

(a) 900um fiber diameter and FC/APC connector type (QLD1x6P-xxC0)

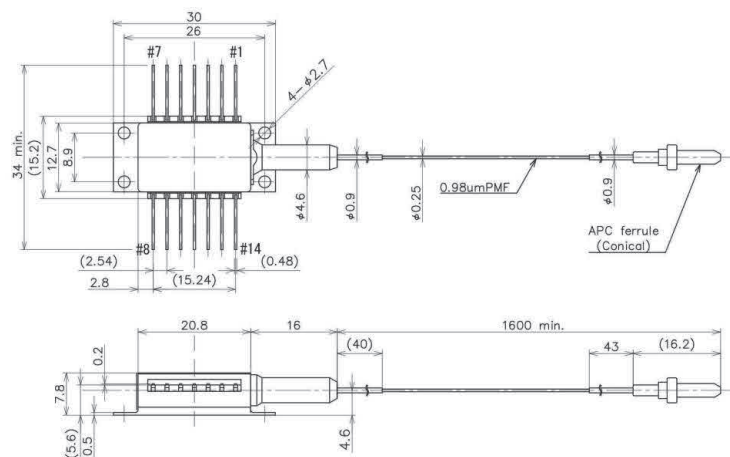

(b) 250um fiber diameter and ferrule type (QLD1x6P-xxC0-11)


QD LASER

QLD1x6P-xxC0

C00233-02

8. PIN CONFIGURATION

No.	Description	No.	Description
1	TEC (+)	8	NC
2	Thermistor	9	NC
3	PD Anode	10	Laser Anode
4	PD Cathode	11	Laser Cathode
5	Thermistor	12	NC
6	NC	13	Case Ground
7	NC	14	TEC (-)

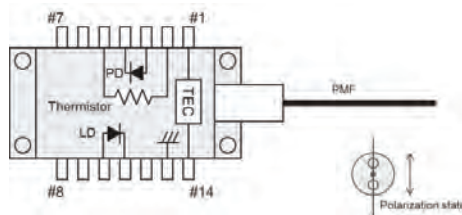

9. NOTICE

• Safety Information

This product is classified as Class 4 laser product, and complies with 21 CFR Part 1040.10.

Please do not take a look at laser lighting in operations since laser devices may cause troubles to human eyes.

Please do not eat, burn, break and make chemical process of the products since they contain GaAs material.

• Handling products


Semiconductor lasers are easily damaged by external stress such as excess temperature and ESD.

Please pay attention to handling products, and use within range of maximum ratings.

QD Laser takes no responsibility for any failure or unusual operation resulting from improper handling, or unusual physical or electrical stress.

• RoHS

This product conforms to RoHS compliance related Directive (EU) 2015/863.

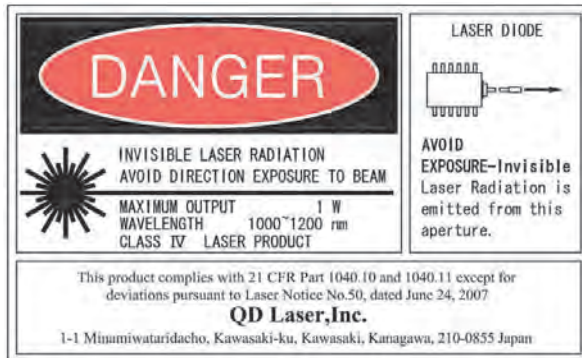

QD Laser, Inc.

Contact : info@qdlaser.com <https://www.qdlaser.com>

Copyright 2020-2024 All Rights Reserved by QD Laser, Inc.

Keihin Bldg. 1F 1-1 Minamiwatarida-cho, Kawasaki-ku, Kawasaki, Kanagawa Zip 210-0855 Japan

All company or product names mentioned herein are trademarks or registered trademarks of their respective owners. Information provided in this data sheet is accurate at time of publication and is subject to change without advance notice.