
IMM photonics

1278nm DM LASER


EP1278-DM-TP39

eblanaphotonics




PRECISION HF DETECTION

Eblana Photonics EP1278-DM-B laser diode, available at a range of wavelengths from 1260 - 1288nm, is designed specifically for detection of Hydrogen Fluoride. Eblana's Discrete-Mode (DM) technology enables cost effectiveness with mode-hop free tunability and excellent SMSR.

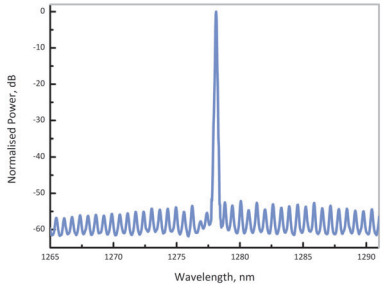

Optical Spectrum at 25°C

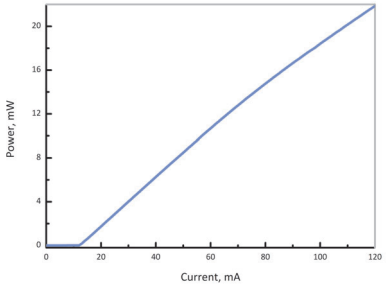

Output power as a function of bias current

ELECTRO-OPTICAL CHARACTERISTICS* (T_{SUB} = 25° C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Centre Wavelength Range	λ	1260	1278	1288	nm
Wavelength specification	λ_{spec}	λ -1	λ	λ +1	nm
Side Mode Supression Ratio	SMSR	30	40	-	dB
Threshold Current	I_{th}	-	15	20	mA
Output Power	P_f	10	15	-	mW
Optical linewidth	Δf	-	-	2	MHz
Temperature Tuning Coefficient	T_λ	0.07	0.1	0.14	nm/°C
Current Tuning Coefficient	I_λ	0.008	0.01	0.020	nm/mA
Slope Efficiency	SE	0.15	0.23	-	mW/mA
Thermistor Resistance	R_T	9.7	10	10.3	kΩ
Thermistor Temp. Coefficient	C	-	-4.4	-	%/°C
Beam divergence - perpendicular	$\theta\perp$	-	28	-	degrees
Beam divergence - parallel	$\theta\parallel$	-	25	-	degrees

*CW bias unless otherwise stated

eblanaphotonics

www.eblanaphotonics.com
Sales@eblanaphotonics.com
Dublin, Ireland

Individual. Innovative. Exceptional.

Distributed by IMM Photonics GmbH | imm-photonics.de | phone +49 89 321412-57 | sales@imm-photonics.de


ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Forward Current	I_f	-	80	120	mA
Forward Voltage	V_f	-	1.3	1.6	V
TEC Current	I_{TEC}		-	0.7	A
Reverse Voltage LD	V_{rev}	-	-	2.0	V
Case Temperature*	T_{Case}	-20	-	65	°C
Chip Submount Temperature	T_{Sub}	0	-	50	°C
Storage Temperature	$T_{storage}$	-40	-	85	°C

*For T_{sub} < 25°C, Max Case Temperature should be derated to $T_{Case,Max} = T_{sub} + 40°C$

PACKAGING

The EP1278-DM-TP39 product series is offered in an industry-standard TO39 package - Inquire for other packaging options. The standard package pinout is shown below, variations may be requested



TO39 schematic - outside bottom view

PIN NO	DESCRIPTION
1	TEC+
2	LD+
3	Thermistor
4	Thermistor
5	LD-
6	TEC-

Standard "Pinout 01" option

HOW TO ORDER

Construct your part number using the following example and email your order to sales@eblanaphotonics.com, or call +353 1 675 3228.

EP1278 – 1 – DM – TP39 – 01

- EP1278 – 1: Wavelength Band
- DM: Single Mode
- TP39: Package Description: TP39 = TO39 with TEC
- 01: Pinout 01

Laser Safety

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1,Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton.

©Elbana Photonics 2017. Eblana Photonics Reserves the right to amend this document at any time, without prior warning. ©Eblana Photonics Series 1278-DM-TP39 Rev 2.01

eblanaphotonics

www.eblanaphotonics.com
Sales@eblanaphotonics.com
Dublin, Ireland

Individual. Innovative. Exceptional.

Distributed by IMM Photonics GmbH | imm-photonics.de | phone +49 89 321412-57 | sales@imm-photonics.de