


2020nm Fabry Perot Laser

EP2020-FP-TP39-01



eblanaphotonics

COHERENCE AND STABILITY

Eblana Photonics EP2020-FP-TP39 laser diode, available in the range of wavelengths from 1950-2150nm, is a cost effective, highly coherent laser source. Eblana's advanced epistructure design is used to deliver an InP-based strained quantum-well FP laser with applications in CO₂ monitoring and free space comms.

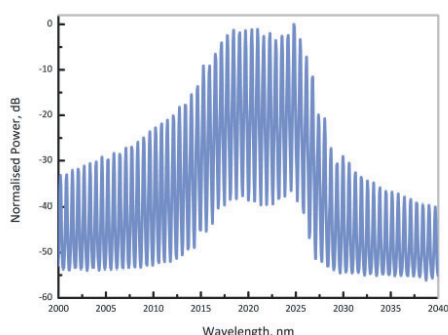

Optical Spectrum at 25°C

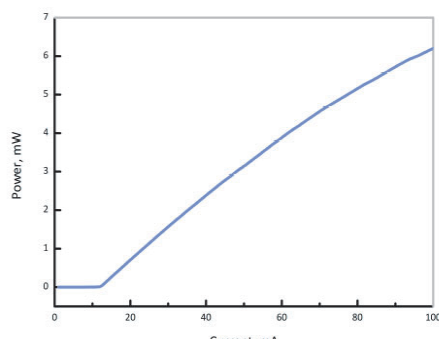

Output power as a function of bias current

Electro-Optical Characteristics (T_{SUB} = 25° C)

Parameter	Symbol	Units	Min.	Typical	Max.	Comments
Available Wavelength Range	λ	nm	-	2020	-	
Side Mode Supression Ratio	SMSR	dB	-	N/A	-	
Threshold Current	I _{th}	mA	-	20	30	
Facet output power	P _f	mW	6	10	-	CW, at I _{op} =80mA
Forward Voltage	V _f	V	-	1.3	1.6	
Temperature Tuning Coefficient	T _λ	nm/°C	-	0.5	-	
Slope Efficiency	SE	mW/mA	0.1	0.12	-	
Thermistor Resistance	R _T	kΩ	9.7	10	10.3	
Thermistor Temp. Coefficient	C	%/°C	-	-4.4	-	
Beam divergence - perpendicular	θ _⊥	degrees	-	46	-	CW, at I _{op} 25°C, FWHM
Beam divergence - parallel	θ _∥	degrees	-	33	-	CW, at I _{op} 25°C, FWHM

Table 1: Electro-optical characteristics


eblanaphotonics
www.eblanaphotonics.com
Sales@eblanaphotonics.com


Dublin, Ireland

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Units	Min.	Max
Forward Current	I_f	mA	-	120
Forward Voltage	V_f	V	-	0.6
TEC Current	I_{TEC}	A	-	0.7
Reverse Voltage LD	V_{rev}	V	-	2
Case Temperature	T_{case}	°C	-20	65
Storage Temperature	$T_{storage}$	°C	-40	85

PACKAGING

The EP2020-FP-TP39 product series is offered in an industry standard TO39 package - Inquire for other packaging options. The standard package pinout is shown below, variations may be requested.

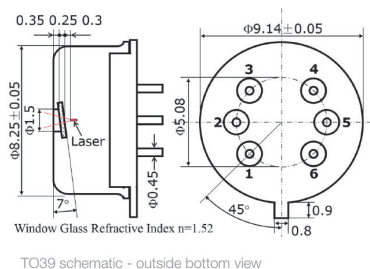


PIN NO	DESCRIPTION
1	TEC+
2	LD+
3	Thermistor
4	Thermistor
5	LD-
6	TEC-

Standard "Pinout 01" option

HOW TO ORDER

Construct your part number using the following example and email your order to sales@eblanaphotonics.com, or call +353 1 675 3220.

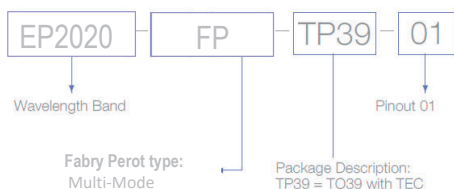

LASER SAFETY

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1, Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton



3 West Pier Business Campus
Dun Laoghaire,
Co. Dublin,
A96 A621
Ireland

Call: +3531 675 3220 Email: sales@eblanaphotonics.com



eblana photonics

©Elbana Photonics 2015. Eblana Photonics Reserves the right to amend this document at any time, without prior warning.

Individual. Innovative. Exceptional.

Distributed by IMM Photonics GmbH | imm-photonics.de | phone +49 89 321412-57 | sales@imm-photonics.de